


MD110

11 / 10 module for FYRA loop

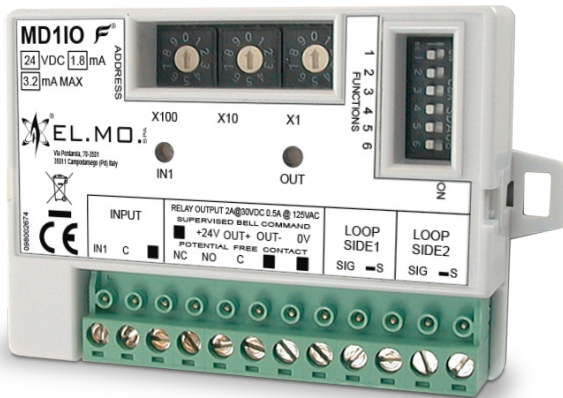

Data sheet

Model	MD110
Product code	MIIE0MC00800
Inputs/Outputs	1 input and 1 output
Use	Balanced input / not balanced input for alarm and fault (line opening and line short circuit), used to connect on the loop 1 detector or other conventional device provided with N.O. relay outputs. Output to command acoustic, optical-acoustic devices or other devices
Integrated isolator	Yes
Addressing	Via rotary switch
Connections	Connections for N.O. inputs, realy output and loop connection
Dimensions	W 91,6 x H 54,7 x D 20 mm
Power consumption	1,8 mA idle status (bilance inputs) 4,7 mA when short circuit (isolator activation) 3,2 mA alarm status
Power supply	DC24V from loop
Certification	Certification CPR 305/2011 EN54-18 and EN54-17

Main features

- 11 / 10 module for FYRA loop
- **Balanced input / not balanced input for alarm and fault (line opening and line short circuit), used to connect on the loop 1 detector or other conventional device provided with N.O. relay outputs. Output to command acoustic, optical-acoustic devices or other devices**
- **Certification CPR 305/2011 EN54-18 and EN54-17**